

Ecostat universal
Bath thermostat for exposed installation
 Finish: **Chrome** Article Number: **13123000**



Description

product features

- projection 194 mm
- 2 functions
- thermostat cartridge, shut-off/ diverter valve
- maximum flow rate at 3 bar: 20 l/min
- flow rate for bath spout at 3 bar: 20 l/min
- flow rate of hand shower at 3 bar: 16 l/min
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- Safety stop at 40 °C
- temperature limitation adjustable
- non-return valve
- with silencer
- material handles: plastic
- connection dimension: DN15
- connection type: G 1/2
- centre distance: 150 ± 12 mm
- dirt filter included

Technology




Certificates / Sustainability



Product image




Scale drawing

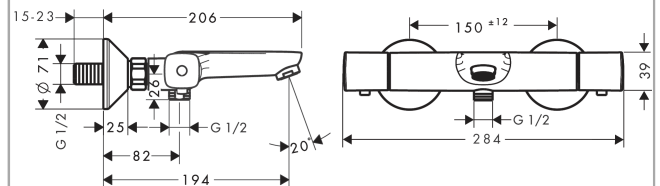

Ecostat universal
Bath thermostat for exposed installation
 Finish: **Chrome** Article Number: **13123000**



Flowchart

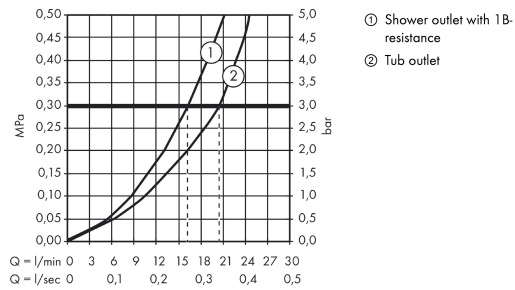


Ecostat universal
Bath thermostat for exposed installation
 Finish: **Chrome** Article Number: **13123000**



Exploded Drawing

Year of production: >01/14

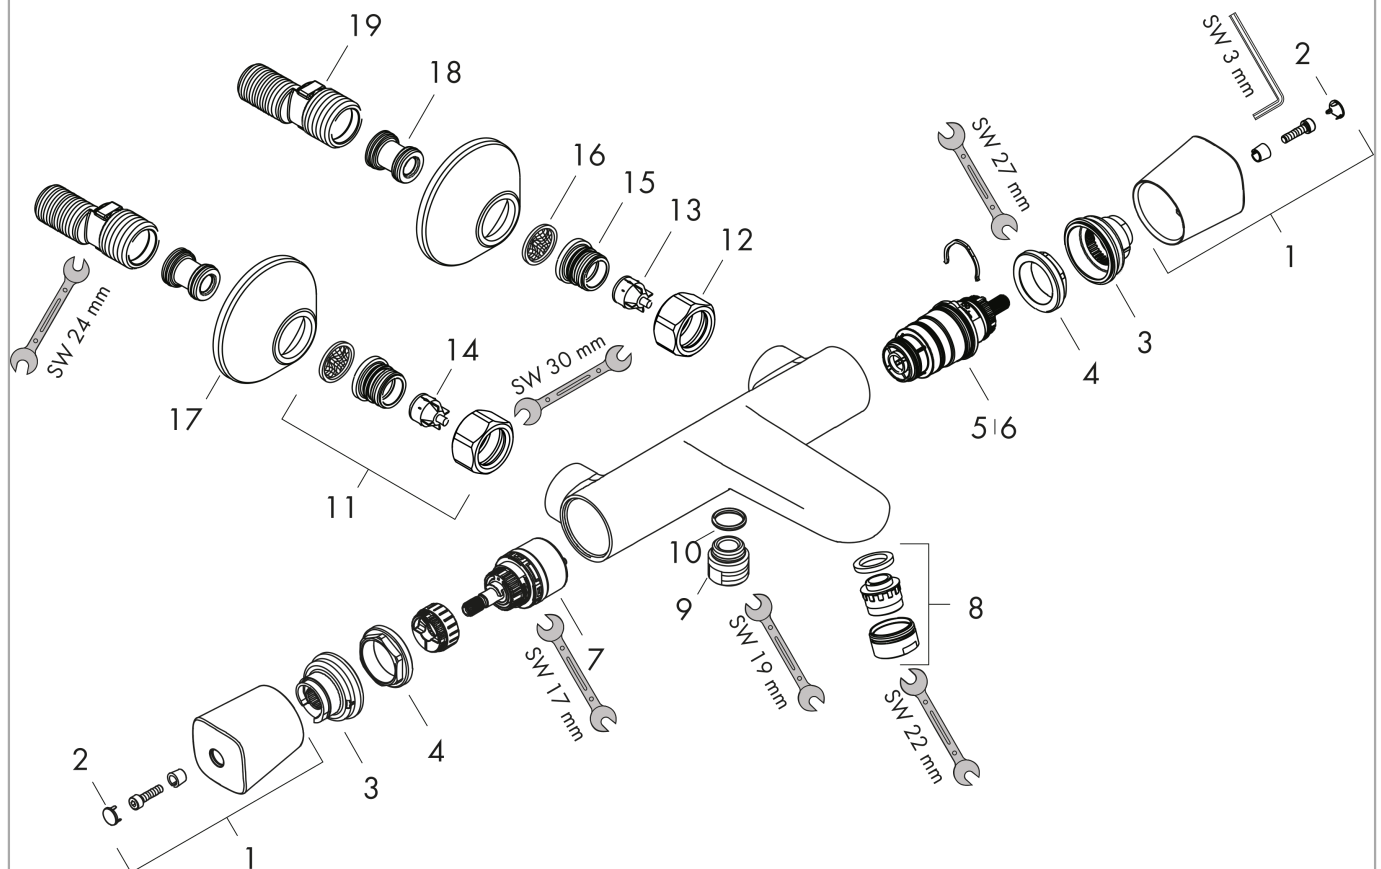

Ecostat universal
Bath thermostat for exposed installation
 Finish: **Chrome** Article Number: **13123000**



Spare part list

Year of production: >01/14

Pos.	Description	Article Number	PC	PU
1	handle	95780000	9	1
2	cover cap	95433000	2	1
3	safety set for temperature control	98916000	4	1
4	nut	98913000	6	1
5	thermostat cartridge	98282000	14	1
6	cartridge for exchanged connections	92373000	18	1
7	shut off unit with selector	98283000	12	1
8	aerator M24x1 (30 l/min)	96512000	5	1
9	connecting thread	95392000	6	1
10	O-ring 14x2	98129000	1	1
11	set of unions	94285000	99	1
12	set of nuts	96157000	8	1
13	non return valve	96737000	8	1
14	non return valve (pressure-resistant up to 2 MPa)	93136000	8	1
15	O-ring 17x1,5	98137000	1	1
16	filter packing	96922000	3	1
17	escutcheon Ø 70 mm	94135000	4	1
18	noise reduction	96429000	2	1
19	set of S-unions (±12 mm)	94140000	10	1
a	set of S-unions (±32 mm)	98592000	9	1
b	pushbutton	92848000	2	1