


Geberit Type 333 fill valve, lateral water supply connection, 3/8" and 1/2", nipple made of brass

■ GEBERIT

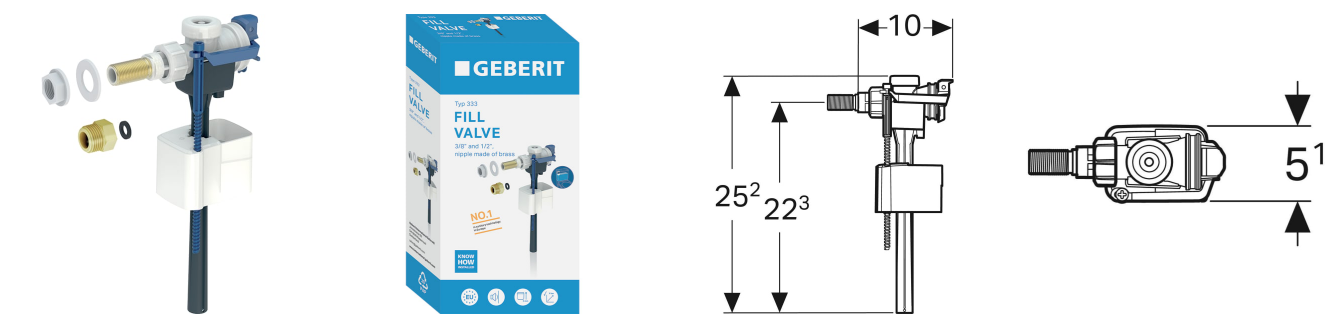

APPLICATION PURPOSES

- For installation in exposed cisterns with lateral water supply connection
- For greywater (rainwater) with pH value 6.0–9.5, if a filter system is used
- For ceramic cisterns
- For potable water

- For water supply connections 3/8"
- For water supply connections 1/2"

CHARACTERISTICS

- Adjustable filling height
- Water supply connection on the left/right
- Threaded nipple made of brass

TECHNICAL DATA

Flow pressure	0.1–10 bar
Storage temperature	≤ 40 °C

SCOPE OF DELIVERY

- Adapter made of brass, G 3/8" / G 1/2"

Art. no.	B cm	H cm	T cm
136.724.00.3	5.1	25.2	10