


Geberit Type 383 fill valve, lateral water supply connection, 3/8", nipple made of brass

■ GEBERIT

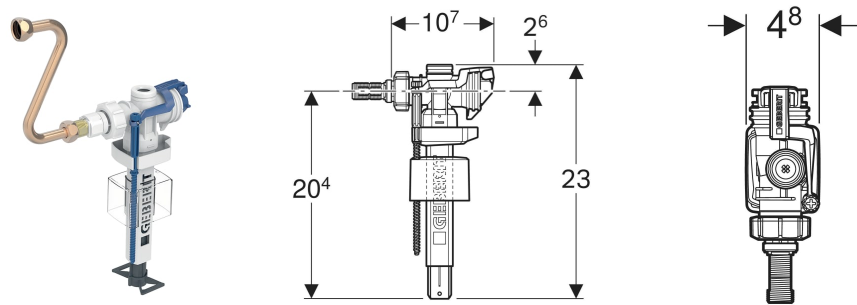

APPLICATION PURPOSES

- For installation in exposed cisterns with lateral water supply connection
- For Geberit concealed cisterns
- For greywater (rainwater) with pH value 6.0–9.5, if a filter system is used
- For potable water
- For water supply connections 3/8"

CHARACTERISTICS

- Adjustable filling height
- Threaded nipple made of brass
- Water supply connection on the left/right
- Low-noise in accordance with tap group I (DIN 4109)

Storage temperature	≤ 40 °C
Flow rate at 0.5 bar	0.06 l/s
Flow rate at 3 bar	0.16 l/s

SCOPE OF DELIVERY

- Filter for nipple / reinforced braided hose types 350 and 380 filling valves

TECHNICAL DATA

Flow pressure	0.1–10 bar
---------------	------------

Art. no.	B cm	H cm	T cm
246.191.00.5	4.8	23	10.7
New			

New article available from 08.01.2025