

GROHE QUICKFIX | START

BASIN TAP - S-SIZE - PUSH OPEN WASTE SET



Article No: **23551002**
EAN Code: **4005176624117**
Date: **Sep 10. 2026**

PRODUCT DESCRIPTION

Surprisingly easy! Refreshed for busy modern bathrooms, the GROHE Start basin tap offers comfort, superior sustainability and easy fitting

Let GROHE Start make an instant difference to your bathroom, with refined and refreshed looks and performance. The GROHE Start single-lever mixer in S size – our QuickFix bestseller – has a slim, contemporary profile and increased spout height for greater user comfort. The push-open waste can be opened and closed with a light fingertip push. Inside the GROHE SilkMove ceramic cartridge offers durable, precise volume and temperature control via the solid metal lever, and the EcoStart feature also avoids wasting energy, because only cold water flows from the mid-lever position. The flow limiter reduces your water consumption to an efficient flow rate of 5l/min (at 3 bar) without compromising on performance. Isolated inner water ways ensure that water is lead- and nickel-free within the tap. Finished in the dazzling but hard-wearing GROHE LongLife coating this bathroom tap will stay looking pristine for a lifetime. Designed for single-hole installation and with the GROHE QuickTool, QuickGuide and QuickVideo the tap can be fitted in no time. Extend your guarantee from five to six years by registering your GROHE Start!



PRODUCT INFORMATION

- monobloc installation
- metal lever
- 28 mm ceramic cartridge with **GROHE SilkMove**
- **OpenCold** - cold water flow in mid-lever position
- adjustable flow rate limiter
- with temperature limiter
- **GROHE LongLife** finish
- **AquaCalibrator**
- maximum flow rate (at 3 bar): 5.7 l/min
- **Protected Water Ways** no contact of water with lead or nickel inside the tap
- smooth body with push-open waste set 1 1/4"
- flexible connection hoses
- GROHE QuickTool included


GROHE QUICKFIX | START

BASIN TAP - S-SIZE - PUSH OPEN WASTE SET




TECHNICAL DATA

Surface finish	Polished
Min. recommended pressure (kn/m2)	100
Max. recommended pressure (kn/m2)	500
Type of waste set	Push-open waste set
Installation type	Deck-mounted
Position of lever	Top
Faucet size	S
Size of cartridge (mm or inch)	28

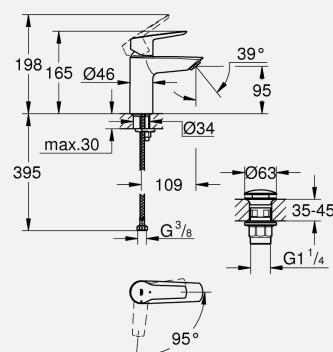

FLOW PROPERTIES

Flow rate at 3bar (l) **5**

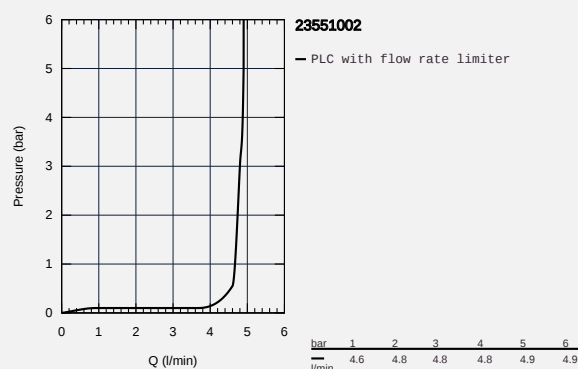

SPARE PARTS

- 1 Shield for cross handle (order no. 46116000)
- 2 Cartridge (order no. 48518000)
- 3 Flow restrictor (order no. 48159000)
- 4 Shank mounting kit (order no. 46645000)
- 5 Waste set with push-open plug (order no. 65807000)
- 5.1 Nipple (order no. 45986000)
- 6 Mounting wrench (order no. 19017000)

