



38 661 000 FLUSHING CISTERN GD 2

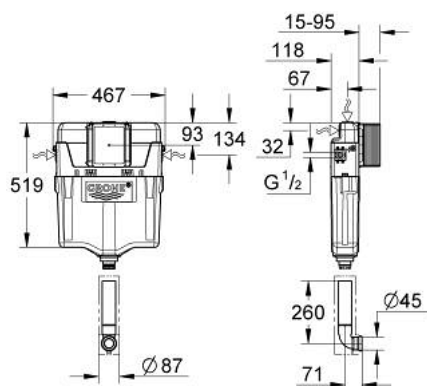

PRODUCT DESCRIPTION

- Colour: chrome
- 6 - 9 l adjustable
- adjustment ex factory 6 l and 3 l
- pneumatic discharge valve offering 3 modes of operation: dual flush or start/stop or single flush
- water supply from left/right/back or top
- low noise (group I acc. to German Noise Specification)
- insulated against condensation
- ½" water supply connection including integrated angle valve and push fit flexible hose union
- no tools required for the installation of the inspection shaft incl. protection during construction phase
- for vertical or horizontal use
- flush pipe insulated against condensation
- fixing brackets
- without wall plate/actuation
- GROHE Water Saving - Less water, perfect flow
- for mounting of small flush plates please order revision shaft 40 911 000 (sold separately)

38 661 000 FLUSHING CISTERN GD 2

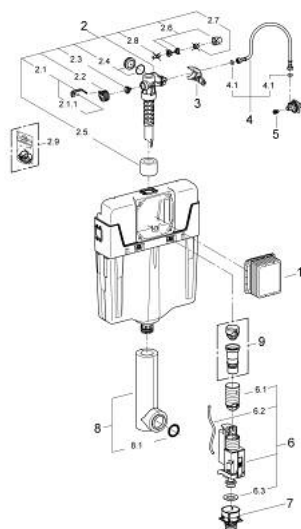

SPARE PARTS, November 2012 – now

- 1: Inspection shaft (Order-nr. 66783000)
 - 2: Filling valve (Order-nr. 37095000)
 - 2.1: Lever (Order-nr. 43734000)
 - 2.1.1: Ball seal dia. 9x6.8 mm (Order-nr. 4377000M)
 - 2.2: Valve head (Order-nr. 43536000)
 - 2.3: Membrane (Order-nr. 4375800M)
 - 2.4: Screw cap (Order-nr. 43735000)
 - 2.5: Valve float, 5 pcs. (Order-nr. 4379100M)
 - 2.6: Repl. kit f. seal (Order-nr. 43722000)*
 - 3: Support device (Order-nr. 42246000)
 - 4: Tube (Order-nr. 42233000)
 - 4.1: Seat washer (Order-nr. 0319100M)
 - 5: Headpart (Order-nr. 42385000)
 - 6: AV1 complete with pipe extension (Order-nr. 42320000)
 - 6.1: Extension for overflow pipe (Order-nr. 42313000)
 - 6.2: pneumatic hose (Order-nr. 42319000)
 - 6.3: Ball seal dia. 9x6.8 mm (Order-nr. 42310000)
 - 7: Valve seat for GD2 (Order-nr. 42315000)
 - 8: Flush pipe, concealed (Order-nr. 43908000)
 - 8.1: Seat washer (Order-nr. 4388000M)
 - 9: 4,5 l Adapter for GD2 (Order-nr. 42333000)*
- * Optional accessories